

FLUKE®


PV350

Pressure/Vacuum Transducer Module

Quick Reference Card


OPERATION

1. Check battery voltage
2. Select units
3. Select settings
4. Zero module
5. Apply pressure

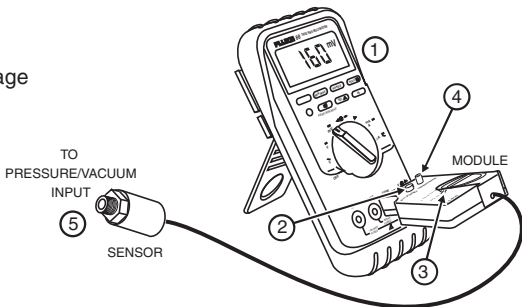

BATTERY TEST

1. DMM and module off
2. DMM to mV range
3. If display less than 100 mV, replace battery



BATTERY REPLACEMENT

1. Remove from DMM and inputs.
Remove screw
2. Replace battery and reassemble
Do not overtighten screws.



Temperature Refrigerant - Code

F	12-F	22-V	502-R	F	12-F	22-V	502-R
-60	19.0	2.0	7.2	26	25.4	49.9	60.1
-55	17.3	9.2	3.9	27	26.1	51.2	61.5
-50	15.4	6.2	0.2	28	26.9	52.4	62.8
-45	13.3	2.7	1.9	29	27.7	53.6	64.2
-40	11.0	0.5	4.1	30	28.5	54.9	65.6
-35	8.4	2.6	6.5	31	29.3	56.2	67.0
-30	5.5	4.9	9.2	32	30.1	57.5	68.4
-25	2.3	7.4	12.1	33	30.9	58.8	69.9
-20	0.6	10.1	15.3	34	31.7	60.1	71.3
-18	1.3	11.3	16.7	35	32.6	61.5	72.8
-16	2.1	12.5	18.1	36	33.4	62.8	74.3
-14	2.8	13.8	19.5	37	34.3	64.2	75.9
-12	3.7	15.1	21.0	38	35.2	65.6	77.4
-10	4.5	16.5	22.6	39	36.1	67.1	79.0
-8	5.4	17.9	24.2	40	37.0	68.5	80.5
-6	6.3	19.3	25.8	41	37.9	70.0	82.1
-4	7.2	20.8	27.5	42	38.8	71.5	83.8
-2	8.2	22.4	29.3	43	39.8	73.0	85.4
0	9.2	24.0	31.1	44	40.7	74.5	87.0
1	9.7	24.8	32.0	45	41.7	76.0	88.7
2	10.2	25.6	32.9	46	42.7	77.6	90.4
3	10.7	26.5	33.9	47	43.6	79.2	92.1
4	11.2	27.3	34.9	48	44.7	80.8	93.9
5	11.8	28.2	35.9	49	45.7	82.4	95.6
6	12.3	29.1	36.9	50	46.7	84.0	97.4
7	12.9	30.0	37.9	55	52.0	92.6	106.6
8	13.5	30.9	38.9	60	57.7	101.6	116.4
9	14.1	31.8	39.9	65	63.8	111.2	126.7
10	14.6	32.8	41.0	70	70.2	121.4	137.6
11	15.2	33.7	42.1	75	77.0	132.2	149.1
12	15.8	34.7	43.1	80	84.2	143.6	161.2
13	16.5	35.7	44.3	85	91.8	155.7	174.0
14	17.1	36.7	45.4	90	99.8	168.4	187.4
15	17.7	37.7	46.5	95	108.3	181.8	201.4
16	18.4	38.7	47.7	100	117.2	195.9	216.2
17	19.0	39.8	18.9	105	126.6	210.8	231.7
18	19.7	40.9	50.0	110	136.4	226.4	247.9
19	20.4	41.9	51.2	115	146.8	242.7	264.9
20	21.0	43.0	52.5	120	157.7	259.9	282.7
21	21.7	44.1	53.7	125	169.1	277.9	310.4
22	22.4	45.3	54.9	130	181.0	296.8	320.8
23	23.2	46.4	56.2	135	193.5	316.6	341.8
24	23.9	47.6	57.5	140	206.6	337.3	362.6
25	24.6	48.8	58.8	145	220.3	358.9	385.0